

Wyndmaster 320HD Two Spindle Automatic Take-up System



FEATURES

- Single Strip Operation
- Two Reel Capacity
- Automatic Reel Transfer
- Non-Contact PC Loop Control
- Sample Strip with Programmable Cut Location
- Operator Start Paper Interleaf with Programmable
 Tensioning

OPTIONS

- Integrated Vision Inspection System
- Dancer Loop Control
- Ultrasonic Loop Control
- Material Component Selection for Corrosive Environments







POWER REQUIREMENTS

120 VAC, single phase, 20A

AIR SUPPLY

80 PSI

MATERIAL WIDTH (MAX)

18 Inches

REEL DIAMETER (MAX) 44 Inches (others available on request)

FEED RATE CAPABILITY 500 IPM


REEL CENTER CORE


8.0 inches (others available upon request)


FEED DIRECTION Left to right or right to left (must be specified).

SPINDLE MOTOR

1/2 HP



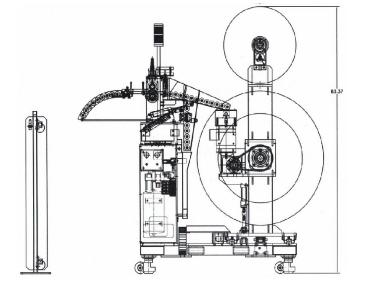





JCR Automation 1426 Ryan Rd New Haven, IN 46774 Phone: 260-493-6606

