



Wyndmaster 100TR

Take-Up System



FEATURES

- Simple Operator Controls
- Variable Speed DC Spindle Drive
- Uhing Traverse Feeder
- Quick Lock Hub
- Adjustable Tension
- Selectable Overwind / Underwind Operation

OPTIONS

- Non-Contact Loop Control
- Paper Interleaf
- Spindle Adapters to Accept Various Reel Cores
- Collapsible Mandrel
- High or Low Limit Shutdown Contacts
- Dancer Loop Control



*Customized Products
For Any Applications!*

jcrautomation.com

JCR Automation
1426 Ryan Rd
New Haven, IN 46774
Phone: 260-493-6606





Wyndmaster 100TR

Specifications

POWER REQUIREMENTS

120 VAC, single phase, 5A

MATERIAL WIDTH (MAX)

3.0 Inches

REEL DIAMETER (MAX)

24.0 Inches

SPINDLE MOTOR

76 RMP, 1/8 HP, DC

FEED RATE CAPACITY

1200 IPM @ 5" Core

SPINDLE DIAMETER

(Per Customer Request)

DRIVE PIN




(Per Customer Request)

TRAVERSE PITCH

0.00 - 2.00 Inches

FEED DIRECTION

Left to Right or Right to Left (Per Customer Request)

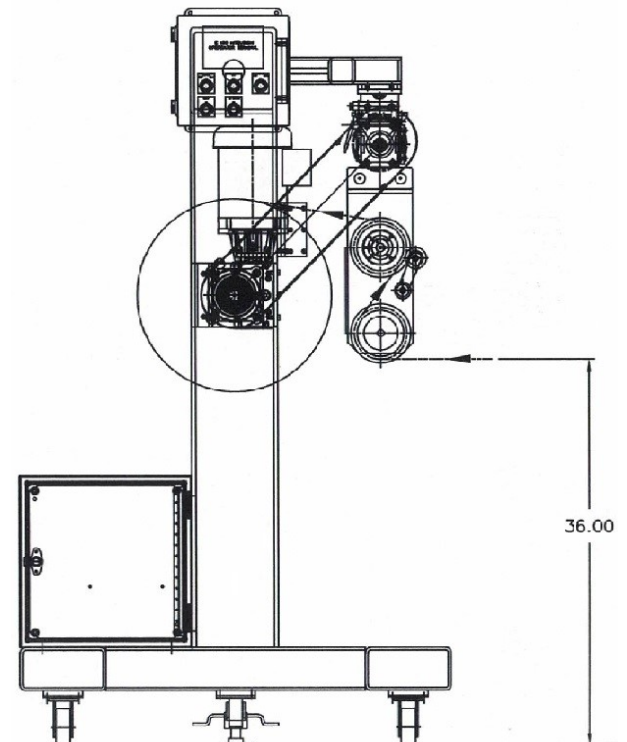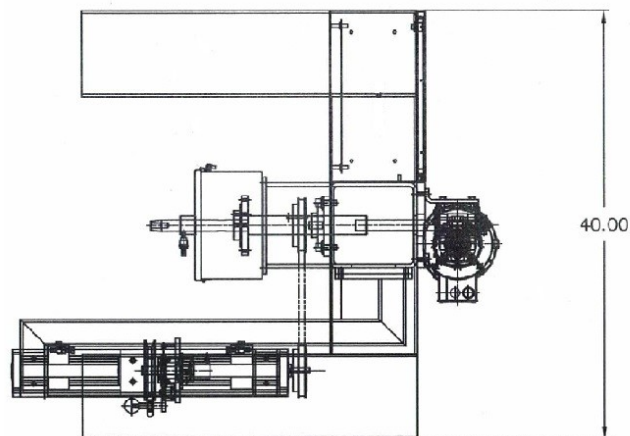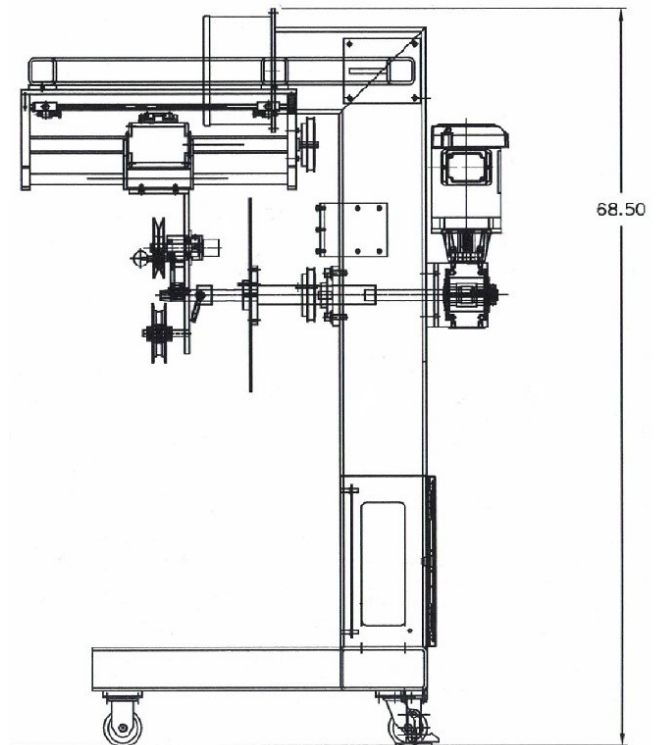

Customized Products
For Any Applications!

jcrautomation.com

JCR Automation
1426 Ryan Rd
New Haven, IN 46774
Phone: 260-493-6606

