



Wyndmaster 300

Automatic Take-up System



FEATURES

- Non-stop production capabilities
- Unattended automatic strip transfer
- Three reel capacity
- Dancer loop and tension control
- Part / Length counter with operator alert system
- Programmable operator interface with diagnostics
- 800 IPM feed rate
- Quick release reel flanges
- Casters and floor brakes
- Quick and simple product changeover

OPTIONS

- Fourth spindle
- Single spindle paper interleaf
- Dual spindle paper interleaf with auto splice
- Sonic non-contact loop control
- Part count non-contact loop control
- Wrapped accumulator
- Non-contact accumulator
- High speed /high torque motors
- Part strip locator
- Collapsible mandrel
- In-feed puller with encoder
- Tail retention gripper
- Over center locking latch fingers
- Material component selection for corrosive environments



**Customized Products
For Any Applications!**

jcrautomation.com

JCR Automation
1426 Ryan Rd
New Haven, IN 46774
Phone: 260-493-6606





Wyndmaster 300

Specifications

POWER REQUIREMENTS

110 VAC, single phase, 10A

AIR SUPPLY

80 PSI @ 5 SCFM

MATERIAL WIDTH (MAX)

3 Inches.

REEL DIAMETER (MAX)

32 Inches

FEED RATE

800 IPM with out accumulator

1200 IPM with accumulator

PAINT COLOR

Vista Green (or Per Customer Requirements)

PRODUCT FEED


Left to right or right to left (must be specified).

SPINDLE CONFIGURATION

Tooled To Customers Reel

SPINDLE MOTOR

1/8 HP, 28:1 ratio, 62 RPM, DC

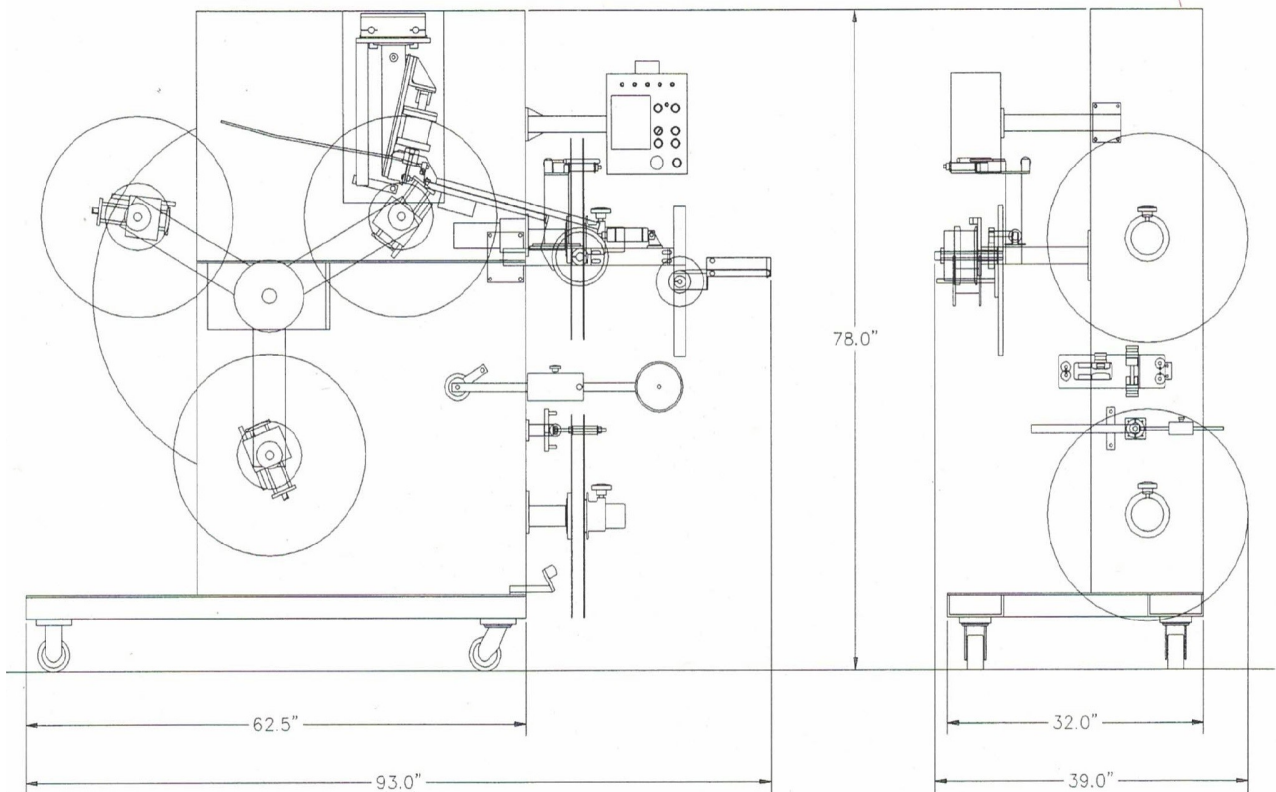

Customized Products
For Any Applications!

jcrautomation.com

JCR Automation
1426 Ryan Rd
New Haven, IN 46774
Phone: 260-493-6606

