


Wyndmaster 320HD Two Spindle Automatic Take-up System



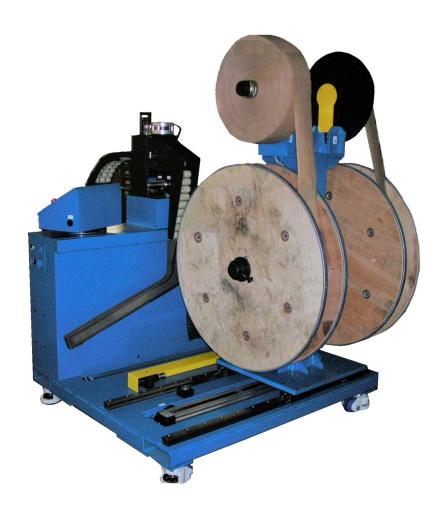

FEATURES

- Single Strip Operation
- Two Reel Capacity
- Automatic Reel Transfer
- Non-Contact PC Loop Control
- Sample Strip with Programmable Cut Location
- Operator Start Paper Interleaf with Programmable Tensioning

OPTIONS

- Integrated Vision Inspection System
- Dancer Loop Control
- Ultrasonic Loop Control
- Material Component Selection for Corrosive Environments









Wyndmaster 320HD Specifications

POWER REQUIREMENTS

120 VAC, single phase, 20A

AIR SUPPLY

80 PSI

MATERIAL WIDTH (MAX)

18 Inches

REEL DIAMETER (MAX)

44 Inches (others available on request)

FEED RATE CAPABILITY

500 IPM

REEL CENTER CORE

8.0 inches (others available upon request)

FEED DIRECTION

Left to right or right to left (must be specified).

SPINDLE MOTOR

1/2 HP

