



Wyndmaster 324

Four Spindle Automatic Take-up System



FEATURES

- Automatic Cut and Transfer
- Switch Selectable Overwind / Underwind Operation
- Non-Contact PC Loop Control
- Four Spindle Operator Start Paper Interleaf
- Tangential Product Feeder
- Adjustable Paper Tension Control
- Part Counter with Operator Alert System
- Programmable Operator Interface with Diagnostics
- Quick Release Reel Flanges
- Sample Strip with Programmable Cut Location
- Single Strip Operation
- Four Reel Capacity

OPTIONS

- Dancer Loop Control
- Programmable Product Tension
- Programmable Paper Tension
- High Speed / High Torque Motors
- Material Component Selection for Corrosive Environment
- Dual Strip Operation



Customized Products
For Any Applications!

jcrautomation.com

JCR Automation
1426 Ryan Rd
New Haven, IN 46774
Phone: 260-493-6606





Wyndmaster 324

Specifications

POWER REQUIREMENTS

120 VAC, single phase, 15A

AIR SUPPLY

80 PSI

MATERIAL WIDTH (MAX)

3 Inches (others available on request)

REEL DIAMETER (MAX)

36 Inches (others available on request)

FEED RATE CAPABILITY

800 IPM

REEL CENTER CORE

5.0 inches (others available upon request)

FEED DIRECTION



Left to right or right to left (Per Customer Request)

SPINDLE MOTORS

76 RPM, 1/8 HP, DC (standard, others available upon request)

SPINDLE DIAMETER

0.75 Inches (Standard, others available on request)

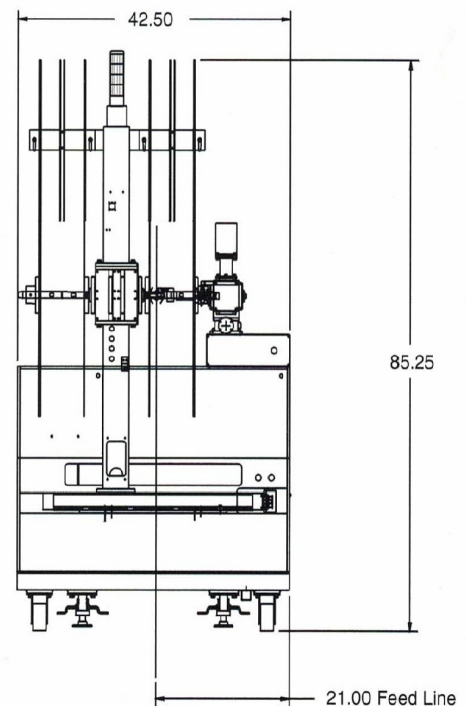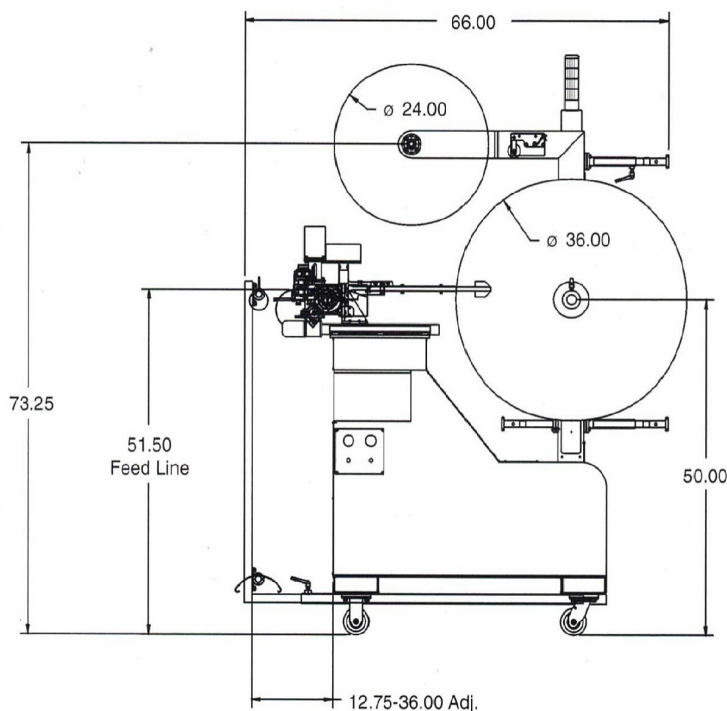

Customized Products
For Any Applications!

jcrautomation.com

JCR Automation
1426 Ryan Rd
New Haven, IN 46774
Phone: 260-493-6606

